

MODEL: **AGN300CR** **AGN600CR** **1/1 Gastronorm glass door refrigerator**



AGN300CR



AGN600CR

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

Review: 01 Date: 22/07/2013

MODELS	Dimensions (mm)			Nº Doors	Nº Shelves	Chamber Volume (L)	Gross Volume (L)	Power (W)	Regimen Temp. (°C)	Ref.	Ref. Weight (gr.)	Net Weight (Kg.)
	Width	Depth	High									
AGN300CR	482	695	2100	1	4	325	700	372	+2°C/+6°C	R134a	270	108
AGN600CR	974	695	2100	2	8	745	1420	494	+2°C/+6°C	R134a	370	176

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODEL: AGN300CR
AGN600CR
1/1 Gastronorm glass door refrigerator
STANDARD FEATURES
➤ Exterior

- AISI 304 Series Stainless Steel,
- Back of galvanized metal plate,
- Adjustable legs up to 200 mm.

➤ Interior

- AISI 304 Series Stainless Steel.
- Wide rounded corners to aid cleaning.
- Drain inside the cabinet.
- LED lighting.

➤ Insulation

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ Doors

- Doors with double glass (6-15-5) and blocked opening hinge,
- Interior of door inserted with a triple chamber door gasket easy to remove,
- Possibility of changing the opening sense of the doors,

Door opening of 580x1495 mm.

OPTIONAL

- Dense wire shelf,
- Set of guides,
- Stainless steel wire shelf,

➤ Shelves

- (4) interior shelves per door of 325x530 mm,
- Guides and shelves easy to take off for cleaning,
- Epoxy-coated extra-dense wire shelf.

➤ Refrigeration

- Temperature and automatic defrost regulated by a digital controller,
- System of Ventilated Condensation,
- System of Forced Evaporation,
- Evaporative pan,
- Evaporator coil coated with anti-corrosion material,
- Climate class 4 (30°C, 55HR).


➤ Electrical

- Electrical connection: 220 V / 1 ph / 50 Hz


- Lock for doors,
- Tropicalized to 43°C,
- Electrical connection 220 V / 1 ph / 60 Hz,
- Electrical connection 115 V / 1 ph / 60 Hz..

MODELS	Dimensions Palletizing (mm)			Crated Weight (Kg.)	Comp. (HP)	Freezing Power (Kg/24h)	Cooling Power (W to -10°C)	Cons. (kWh/24h)	Inten. (A)	Level Noise (dB)	Container 20'/40'/40'HC	Trailer
	Width	Depth	High									
AGN300CR	600	800	2150	118	1/4	-	298	2,32	2,61	57,6	25 / 53 / 53	66
AGN600CR	1070	810	2140	188	3/8	-	464	2,49	3,86	59,1	14 / 28 / 28	37

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



MODEL: AGN300CR	AGN600CR	1/1 Gastronorm glass door refrigerator
------------------------	-----------------	---

PLAN VIEW

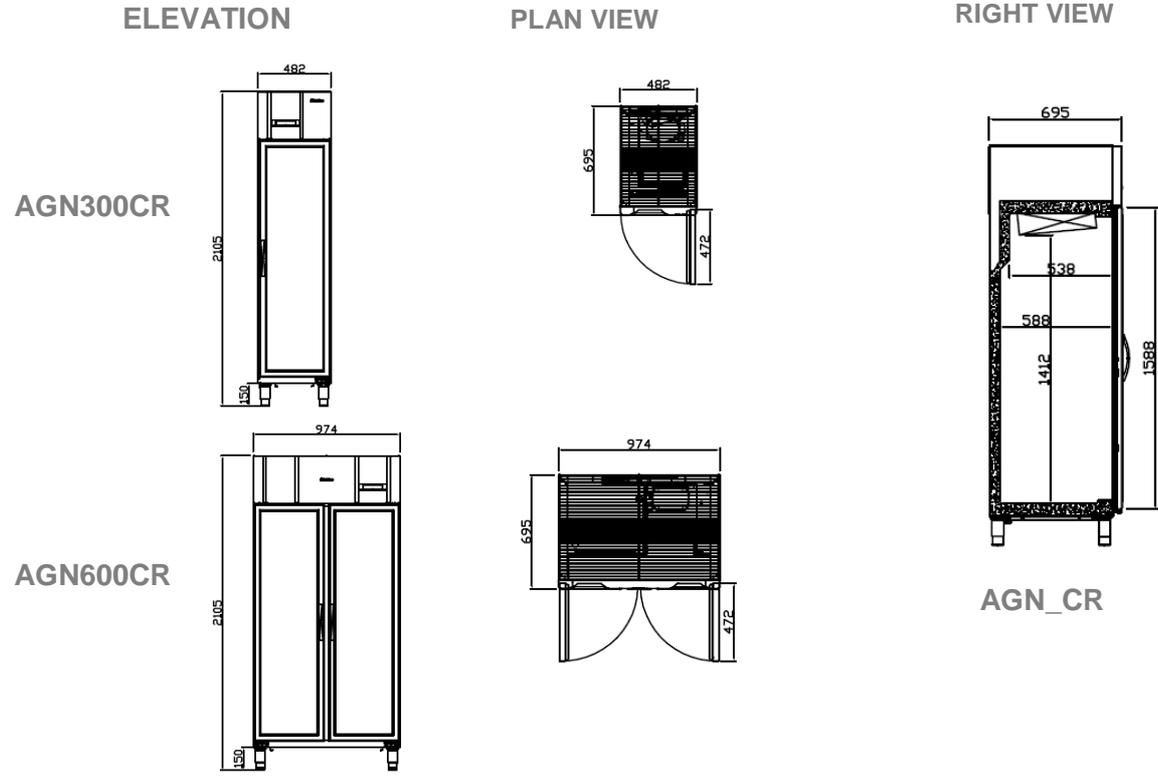

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AGN300CR	300	80	115	100	240
AGN600CR	300	80	115	100	486

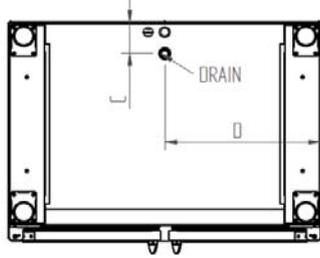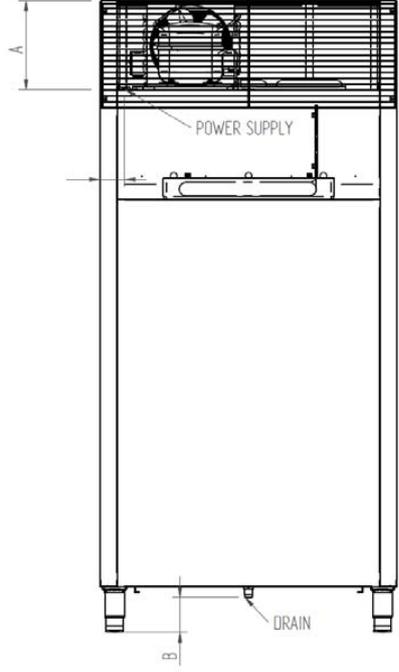

Review: 01 Date: 22/07/2013

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE